## ALL SAFETY PRODUCTS

Length Of Warranty - 3 Year

## SECURITY AND REMOTE START PRODUCTS

#### Length Of Warranty

Limited Lifetime, CrimeStopper will repair or replace defective modules with a comparable new or refurbished module during reasonable usage and the lifetime of the vehicle in which it is originally installed provided that the module is returned to Rockford, shipping pre-paid and accompanied by a legible copy of the original sales receipt from the authorized dealer containing; the consumer's name, authorized dealer's name, date of purchase, item or sku number, product description, and the year make and model of the vehicle in which it is installed. The additional componentry of the system, including but not limited to remotes, antennas and harnesses, are covered by a one year warranty from the date of original purchase. Products received for repair or replacement without proof of purchase from an authorized dealer will be denied.

#### WHAT IS COVERED

This warranty applies only to CrimeStopper products sold to consumers by authorized CrimeStopper dealers in the United States of America Products purchased by consumers from an Authorized CrimeStopper Dealer in any other country are covered only by that country's Distributor and not by Rockford Corporation.

#### **WHO IS COVERED**

This warranty covers only the original purchaser of CrimeStopper product purchased from an authorized CrimeStopper dealer. In order to receive service, the purchaser must provide Rockford Corporation with a copy of the original sales receipt stating the customer name, dealer name, product purchased and date of purchase. Products found to be defective during the warranty period will be repaired or replaced with a product deemed to be equivalent at Rockford's sole discretion.

#### WHAT IS NOT COVERED

- Damage caused by accident, abuse, improper installation, operations, water, and theft
- Any cost or expense related to the removal or reinstallation of product
- Any product which has had the serial number defaced, altered, or removed
- Subsequent damage to other components
- Any product not purchased from an authorized CrimeStopper dealer

#### LIMIT ON IMPLIED WARRANTIES

Any implied warranties including warranties of fitness for use and merchantability are limited in duration to the period of the express warranty set forth above. Some states do not allow limitations on the length of an implied warranty, so this limitation may not apply. No person is authorized to assume for Rockford Corporation any other liability in connection with the sale of the product.

#### HOW TO OBTAIN SERVICE

Please call 1-800-998-6880 for Rockford Customer Service. You must obtain an RA# (Return Authorization number) to return any product to Rockford Corporation. You are responsible for shipment of product to Rockford. cs.support@rockfordcorp.com

SCREEN SIZE	2X3.5" OR 1X7" (MIR-007)
DISPLAY RESOLUTION	480(H) X 272(V)
OPERATING VOLTAGE	10-16 VOLTS
CURRENT DRAW	0.3A
VIDEO SIGNAL	PAL/AUTO/NTSC

**MIR-007** 

**REAR VIEW MIRROR** 

CONGRATULATIONS ON YOUR CHOICE OF A CRIMESTOPPER UNIVERSAL REAR VIEW MIRROR. THIS BOOKLET CONTAINS ALL of the necessary information for connecting and using your mirror. If any questions should arise, contact your installation facility or check out the knowledge base at www.crimestopper.com



# **MIR-007**

# TOUCH LEFT SIDE OF SCREEN TO ACCESS SETTINGS/FEATURES

- Reverse Camera Trigger Press R to show reverse camera R image (only shows camera image if camera is connected to 12V accessory wire).\*
- **CH** Video Image Change Press CH to view different cameras (only shows camera image if camera is connected to 12V accessory wire).\*
- Color Mode Adjustment Change between STANDARD, BRIGHT, BEAUTIFUL and SOFT screen modes.\*

\* Functions not available when in reverse mode.

GND(BLACK) ACC+(RED) VIDEO 1(GREEN) VIDEO 2(WHITE) **CAMERA (PURPLE)** 

Vehicle Ground Vehicle 12V Accessory 12V trigger input for Video 1 12V trigger input for Video 2 12V trigger input for reverse camera CAMERA Camera video input Input for Video Source 1 VIDEO 1 IN VIDEO 2 IN Input for Video Source 2

GND


ACC+

VIDEO 1

CAMERA VIDEO 2 CAMERA

VIDEO 1 IN

VIDEO 2 IN

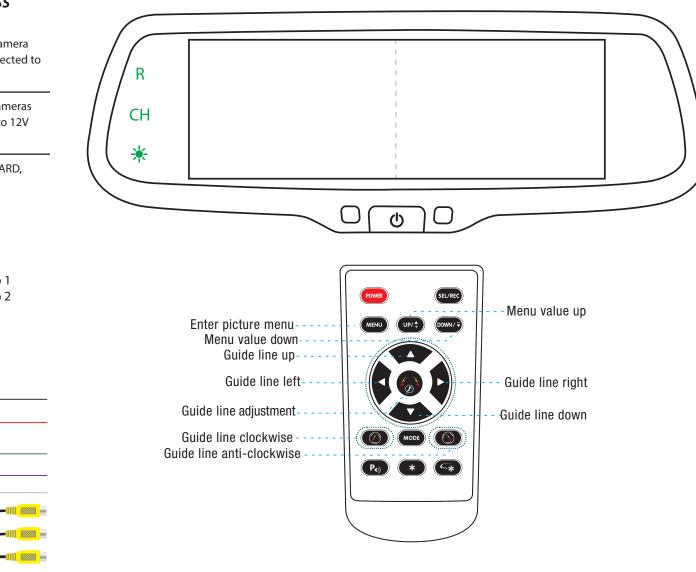

# WIRING DIAGRAM